




BEARING Driveshaft USA CORP.

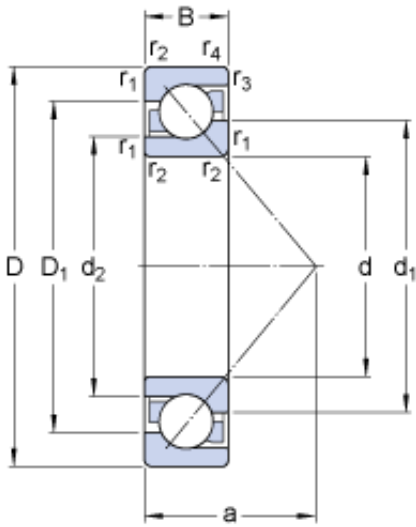

65 mm x 140 mm x 33 mm skf 7313 becbm bearing

Bearing No. 7313 becbm

7313 becbm Bearing 2D drawings and 3D CAD models

Size	140x65x33 mm
Bore Diameter	140 mm
Outer Diameter	65 mm
Width	33 mm
d	65 mm
D	140 mm
B	33 mm
d ₁	94.15 mm
d ₂	78.45 mm
D ₁	112.85 mm
a	60 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	1.1 mm
d _a - min.	77 mm
D _a - max.	128 mm
D _b - max.	133 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	116 kN
Basic static load rating - C ₀	86.5 kN
Fatigue load limit - P _u	3.6 kN
Reference speed	6300 r/min
Limiting speed	6300 r/min
Calculation factor - k _r	0.1



BEARING Driveshaft USA CORP.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	2.31
EAN	7316576650765
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



BEARING Driveshaft USA CORP.

Long Description	65MM Bore; 140MM Outside Diameter; 33MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7313 BECBM
Weight / LBS	5.093
Width	1.299 Inch 33 Millimeter
Bore	2.559 Inch 65 Millimeter
Outside Diameter	5.512 Inch 140 Millimeter
bore diameter:	65 mm
radial static load capacity:	86.5 kN
outside diameter:	140 mm
cage material:	Brass
overall width:	33 mm
outer ring width:	33 mm
contact angle:	40 °
maximum rpm:	6300 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2 mm



BEARING Driveshaft USA CORP.

radial dynamic load capacity:	116 kN
series:	73
d_1	94.15 mm
d_2	78.45 mm
D_1	112.85 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	1.1 mm
d_a min.	77 mm
D_a max.	128 mm
D_b max.	133 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	116 kN
Basic static load rating C_0	86.5 kN
Fatigue load limit P_u	3.65 kN
Calculation factor A	0.112
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	2.15 kg